


Made by professionals for professionals

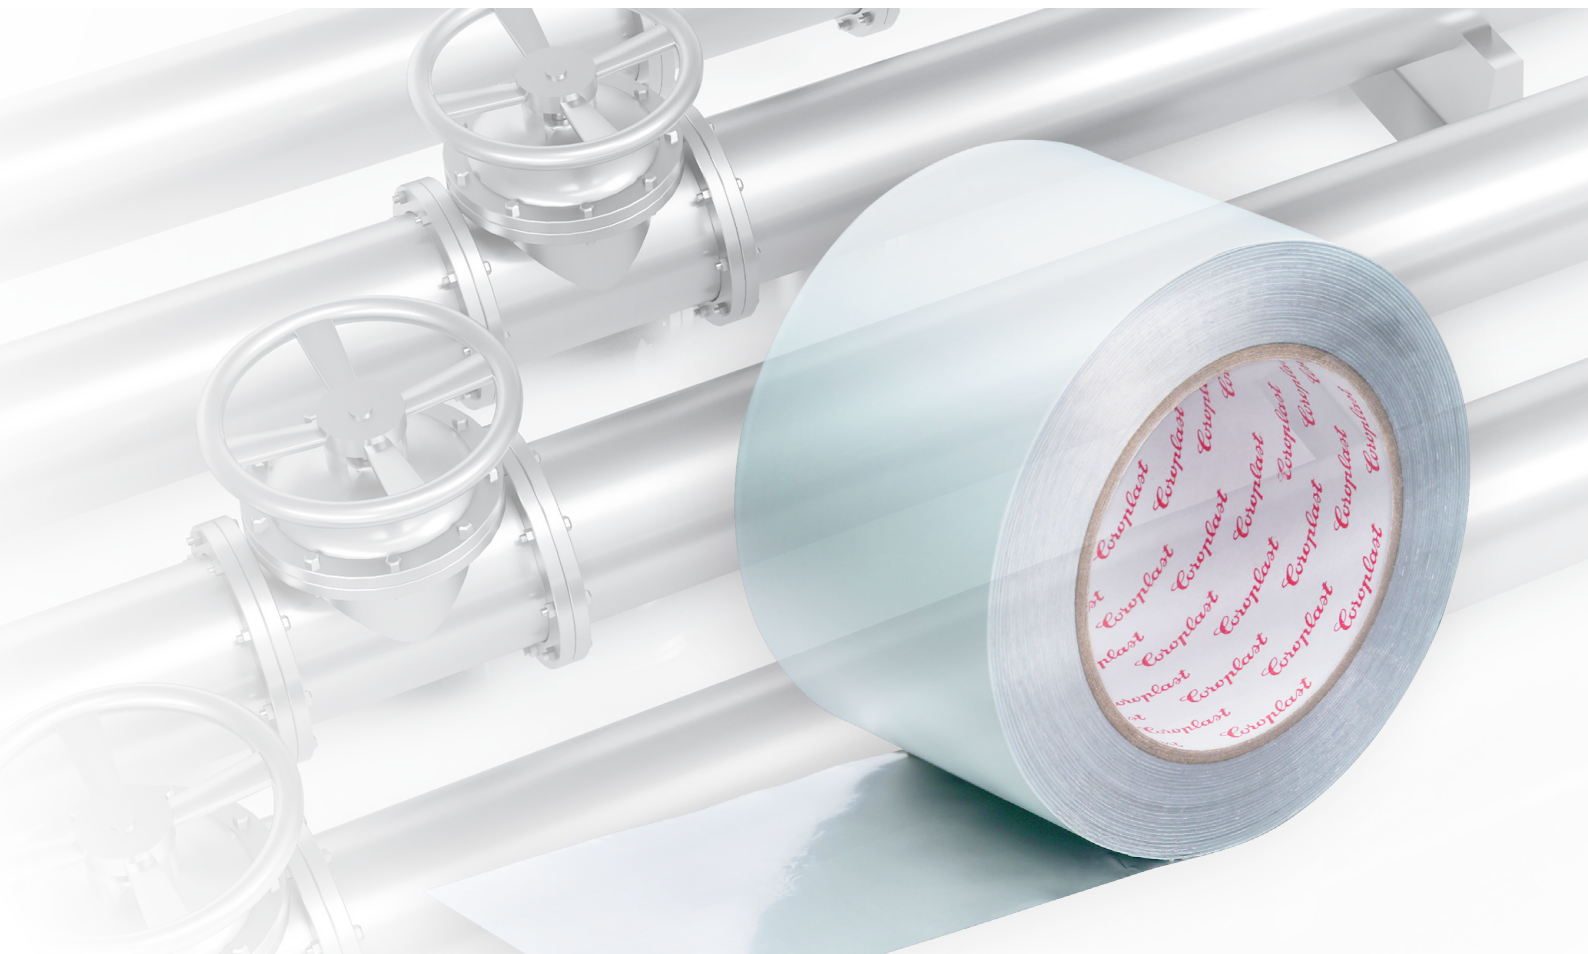

Coroplast 930 ALU SE

The best thing that can happen to aluminum adhesive tape:
Professional insulators appreciate its quality and excellent properties in daily use.


- › Outstanding adhesive strength
 - On all aluminum-clad lamella mats
 - On the back of the adhesive tape
 - On slightly dusty surfaces, making it easy to use on construction sites
- › Excellent shear strength values
- › Soft aluminum foil: can be modeled
- › Low flammability – controlled building product with DIN 4102-B1 certification
- › Less waste due to foil interliner
- › Solvent-free, low emissions, odorless

Keeping you connected.


Coroplast

Safety and quality have a name

Adhesive strength on an aluminum backing to DIN 1939 standard

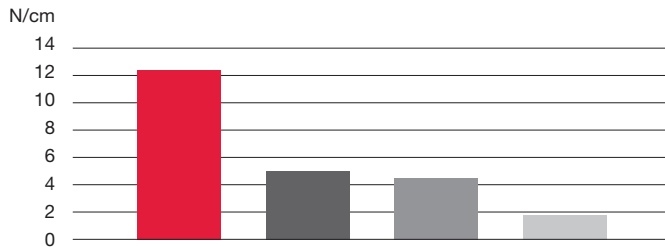

Shear strength, 25 x 25 mm, 1 kg, RT

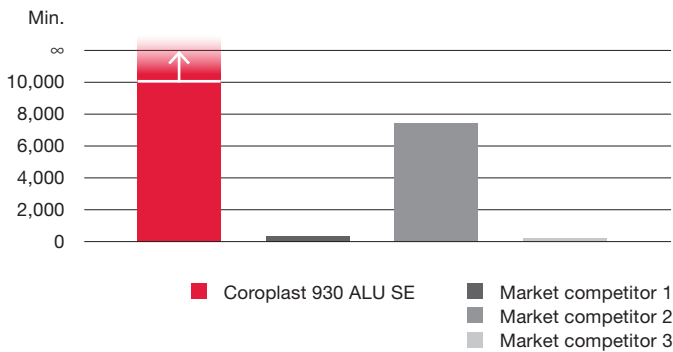

Further advantages:

- › Visible name-brand quality – Coroplast inscribed in the core of the roll
- › External monitoring: In accordance with DIN 4102 and the German BG Verkehr/Schiffssicherheit
- › Internal monitoring: Manufactured in accordance with automotive standard ISO TS 16949
- › Customized widths available, from 20 mm to 1,000 mm
- › Adhesive tape widths are manufactured without accepted tolerances
- › Non-tension manufacturing eliminates curling effect and prevents waste
- › Practical 4-roll shrink-wrap packaging
- › Everything you need is included: instructions, application tool, certification, batch number, etc.
- › Adhesive tape width is clearly marked with a colored sticker on the packaging

Coroplast Fritz Müller GmbH & Co. KG
Tapes – Cables – Cable Assemblies
Wittener Straße 271, 42279 Wuppertal, Germany
T +49 202 2681-221, tapes@coroplast.de
www.coroplast.de



Coroplast